





Key features

- High-performance vibration isolator with active control of 6 degrees of freedom
- Extremely fast settling time
- Realizes extremely noise-free environment to enable scientific advancement
- Available sizes: 500x400 mm and 600x500 mm
- Maximum payload capacity: 80 kg and 160 kg versions
- Super flat and low-weight design, no configuration required and easy to use

Reactio

- Isolation starts at 1.5 Hz and reaches >30 dB at 10 Hz
- Meets extremely low vibration criteria VC-I according to ISO/TS 10811-2 from 1 Hz, and VC-M above 10 Hz
- For various applications like Metrology, Microscopy, Semiconductor production and quality control, In-vitro-fertilization etc.

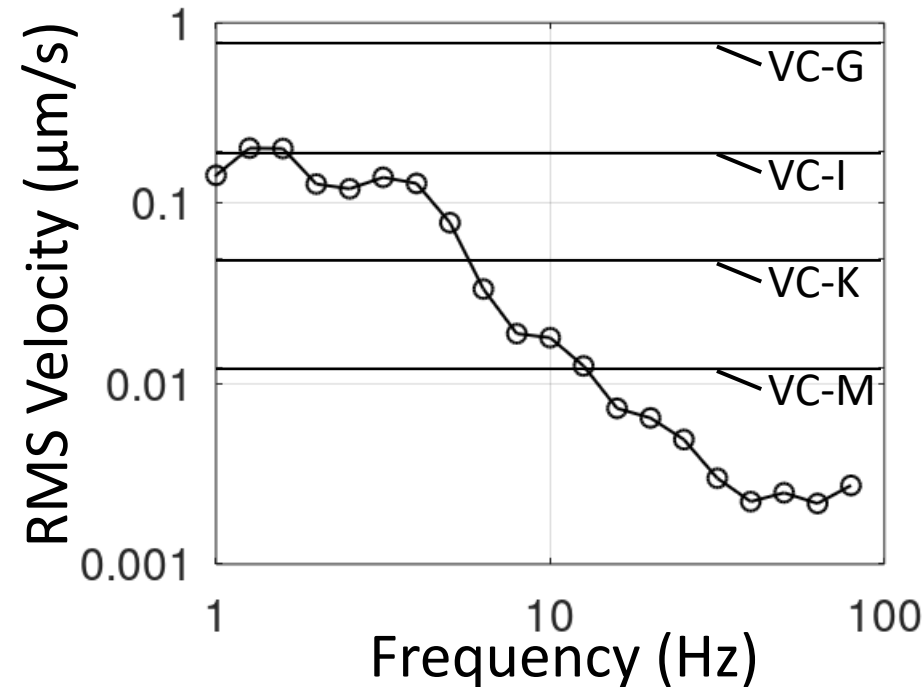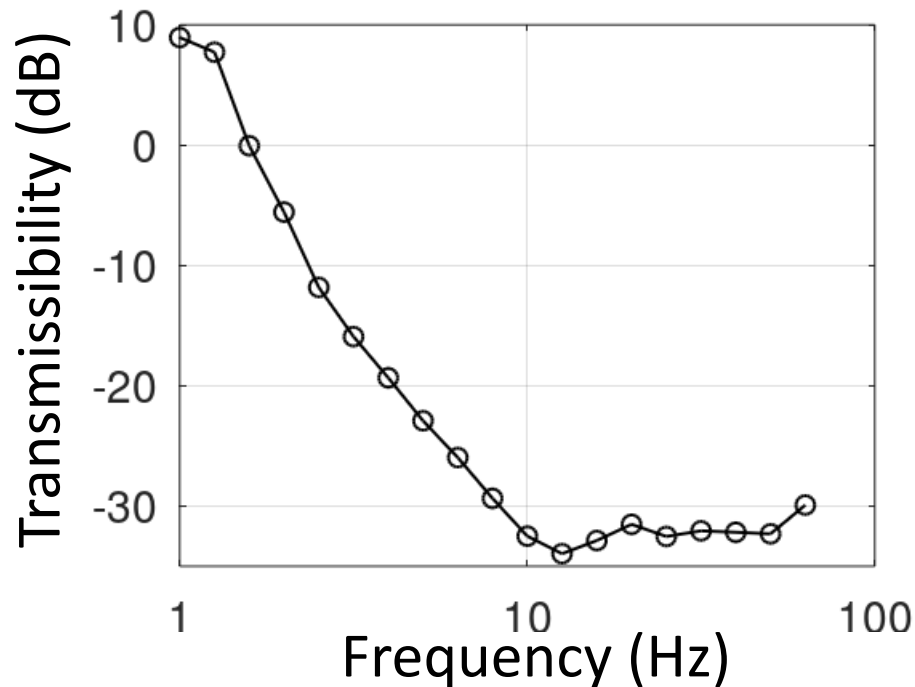

Measured with Wilcoxon 731A in one-third octave bands according to ANSI S1.11-2014 standard