

Reactio plus

SEISMION





Key features

- High-performance vibration isolator with active control of 6 degrees of freedom
- Extremely fast settling time
- Realizes highly noise-free environment to enable scientific advancement
- Available sizes: 500x400 mm and 600x500 mm
- Payload capacity: 100 kg
- Super flat and low-weight design, easy to install and operate

Reactio plus

- For most challenging applications in fields of Metrology, Microscopy, Semiconductor production and quality control, In-vitro-fertilization etc.
- Isolation starts well below 1 Hz, -12 dB at 1 Hz and reaches >40 dB reduction
- Meets ultra-low vibration criteria VC-L according to ISO/TS 10811-2 from 1 Hz, and VC-N above 10 Hz

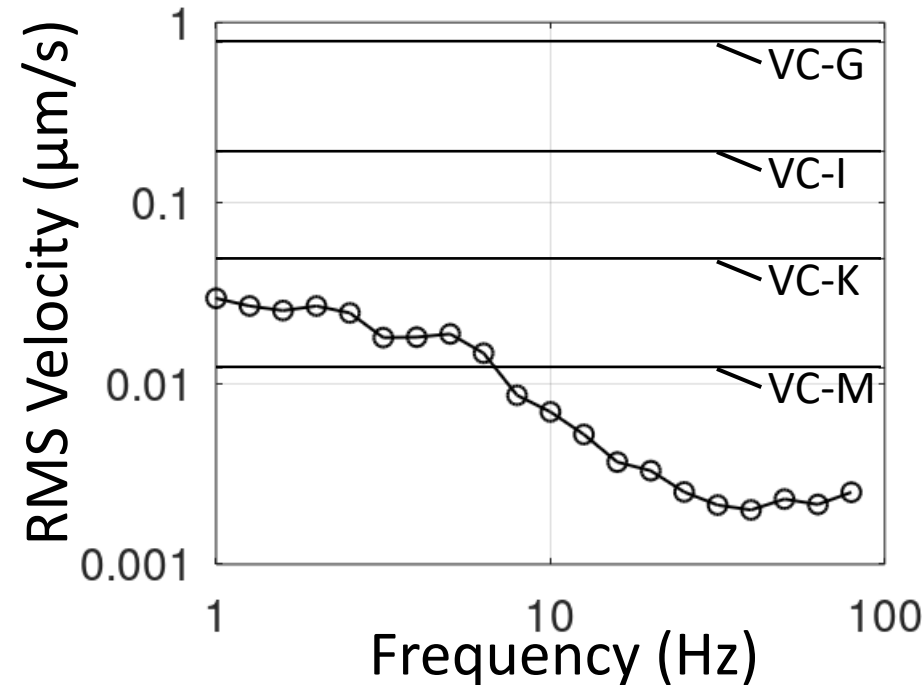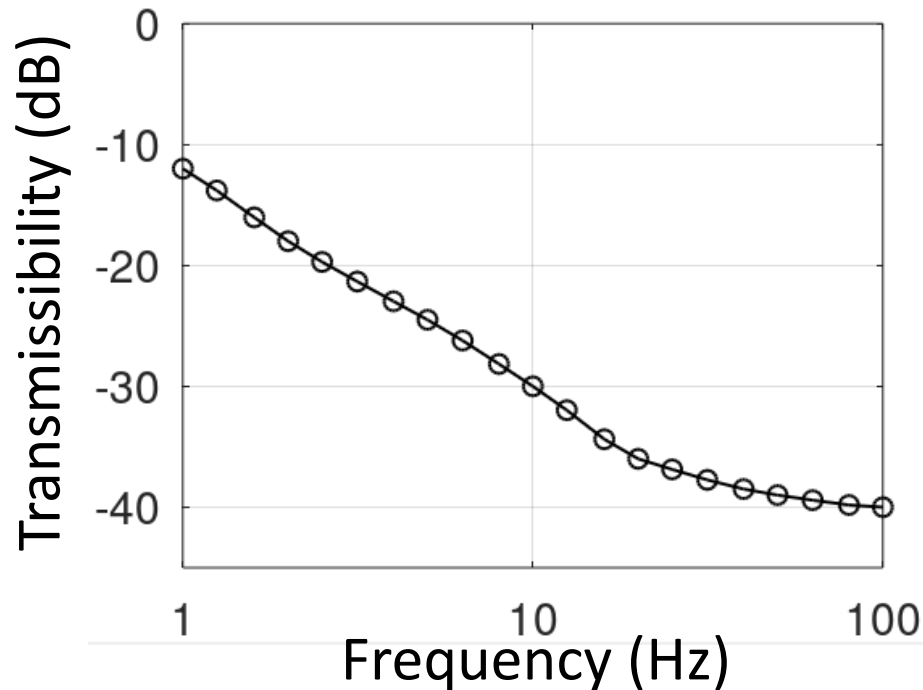

Measured with Wilcoxon 731A in one-third octave bands according to ANSI S1.11-2014 standard